


# REVIT CONTENT GUIDE

**Manufacturer:** Aaon, Inc.  
**Description:** Steam heated/No Cooling air handling unit with Economizer/Power Exhaust & Heat Wheel options  
**File:** Air\_Handling\_Unit-Aaon-RQA-V-NC-STEAM.rfa  
**Type Catalog:** Not Applicable  
**Rendering file:** Not Applicable  
**Schedule file:** Schedule-Aaon, Inc.rvt

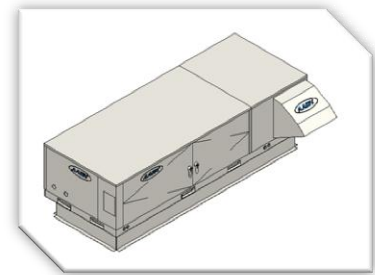

Constraints	
Level	Level 1
Host	Level : Level 1
Offset	0' 0"
Graphics	
Show Curb	<input checked="" type="checkbox"/>
Show Clearance Lines	<input type="checkbox"/>
Clearance_RightSide	4' 0"
Clearance_OutsideAir	3' 0"
Clearance_LeftSide	2' 0"
Clearance_HXC	3' 0"
24 Inch Curb	<input type="checkbox"/>
14 Inch Curb	<input checked="" type="checkbox"/>
Electrical - Loads	
Supply Fan HP	0.000000
RLA	0.00 A
MOCP	0.00 A
MCA	0.00 A
LRA	0.00 A
FLA	0.00 A
Exhaust Fan HP	0.000000
* Apparent Load	0.00 VA
Panel	
Circuit Number	
Mechanical	
Steam Coil Rows	0.000000
Steam Coil FPI	0.000000
Secondary Filter	
Primary Filter	
System Type	Other, Sanitary, Return Air, Supply Air, P
System Name	Default Other (Bryan.Novotny), Def
Mechanical - Airflow	
* Supply Air CFM	0 CFM
* Return Air CFM	0 CFM
Outdoor Air CFM	0 CFM
Heating LAT	0.00 °F
Heating EAT	0.00 °F
Exhaust Air CFM	0 CFM
ESP	0.0000 in-wg
Cooling LAT	0.00 °F
Cooling EAT	0.00 °F
Mechanical - Loads	
Heating Total Capacity	0.00 Btu
Equivalent Total Capacity	0.00 Btu
ERV Total Cooling Capacity	0.00 Btu
Cooling Total Tonnage	0.000000
Cooling Total Capacity	0.00 Btu
Cooling Sensible Capacity	0.00 Btu
Cooling Latent Capacity	0.00 Btu

## Instance Properties

Dimensions	
OffsetCurb	1' 2"
Offset	0' 10 1/8"
Identity Data	
IBD Equipment Number	
AHRI Rating	
Comments	
Mark	9
Phasing	
Phase Created	New Construction
Phase Demolished	None
Analytical Model	
Octave Band - 8000 Hz	0.000000
Octave Band - 63 Hz	0.000000
Octave Band - 500 Hz	0.000000
Octave Band - 4000	0.000000
Octave Band - 250 Hz	0.000000
Octave Band - 2000	0.000000
Octave Band - 125 Hz	0.000000
Octave Band - 1000 Hz	0.000000

## Instance Properties (cont.)

Electrical - Loads	
Voltage	0.00 V
Phase	3
Number of Poles	3
Hertz	0.00 Hz
Structural	
Shipping Weight	0.00 lb
Operating Weight	0.00 lb
Identity Data	
URL	<a href="http://www.aaon.com">http://www.aaon.com</a>
RQ Series Operation Manual	<a href="http://www.aaon.com/literature">http://www.aaon.com/literature</a>
Model Disclaimer	Reference the unit drawing cut
Model	RQA-V-NC-ERC-STEAM
Manufacturer	Aaon, Inc.
IBD Equipment Abbreviation	AHU
For More Information	<a href="http://www.bimadvent.com">http://www.bimadvent.com</a>
Family Version	1.0.0
Date Last Modified	January 21, 2011
Created By	Intelligent Building Design Reso
Copyright	Copyright © 2011 AAON, Inc.
Keynote	
Type Comments	
Description	
Assembly Description	
Assembly Code	
Type Mark	
Cost	
OmniClass Number	23.75.35.14
OmniClass Title	Air Handling Units

## Type Properties

\*Indicates that the parameter is a shared parameter and is schedulable.

### **Loading into the Project:**

One family file is supplied and may be loaded into the project through all traditional methods. The file contains geometry that represents not just the air handling unit, but it also contains a roof curb assembly. Once the family is loaded into a project the user can select a checkbox in the instance properties (Group: Graphics) to toggle the roof curb on/off. As the user does this, the entire height of the resulting assembly is raised or lowered the height of the curb— this does not affect the actual “*Offset*” parameter.

Clearance areas are defined in the family file through the use of solid geometry. Clearance areas are defined at each side of the AHU. This enables the model to report collisions when such a report is queried on the entire model. When displayed, the clearance areas are shown as being mostly transparent and their outlining edges are dashed red lines. Because clearance areas are given their own Sub-Category, they may be hidden through Visibility/Graphics – Mechanical Equipment or through the instance parameter “*Show Clearance Lines.*”

Three types exist for this family: **Economizer, Power Exhaust & Heat Wheel**. Each option sizes accordingly. The model name will update according to the Type selected. Dimensional parameters are not editable by the users.

In the family environment, all geometry for the different types displays together. This may cause some confusion. Each element that applies only to a specific family type is given an on/off visibility parameter. However, regardless the on/off status of the element, the element will *always* display in the family editor. The only distinguishing feature of an element set to *off* is slightly grayed-out lines. This is typical Revit behavior and the family will display each type correctly when loaded into a project.

### **Rendering:**

When the family file is loaded into the project, standard Aeon, Inc. materials are imported. These materials pertain mostly to the housing, Aeon, Inc. logo and the clearance areas.

### **Scheduling:**

Aeon, Inc. products may be scheduled utilizing the schedule view in the given project file “Schedule-Aeon, Inc.rvt”. Select and copy (**Ctrl-C**) the schedule from the sheet view and past it (**Ctrl-V**) into a sheet in your project. The schedule filters are set to look for only those units designated with manufacturer as “Aeon, Inc.”